



VERTICAL FIRE DOOR EXTENSION FOR PAIRED STEEL DOORS

CFD-008-S

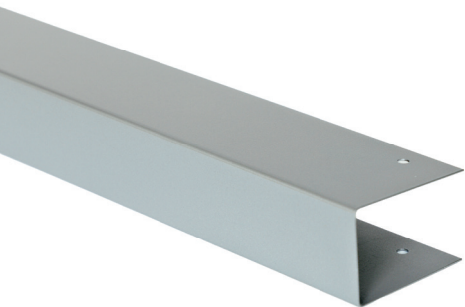

- > UL listed for up to 180 minutes on steel doors
- > UL listed for excessive clearances up to 1" between doors
- > Maintains your fire door assembly's existing fire rating
- > Tested under NFPA-252, ANSI/UL 10B with hose stream, UL 10C, CAN/ULC S104-10
- > Easy install—no door removal required
- > Fastens with screws; thru-bolts no longer required

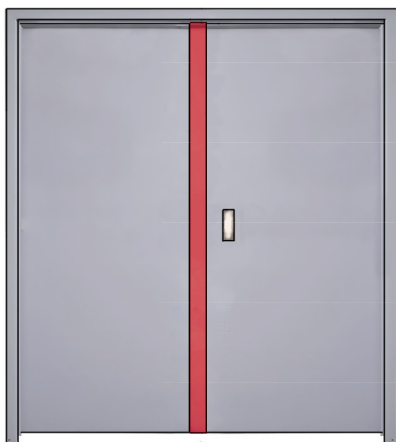

CROWN
FIRE DOOR
PRODUCTS



R27658
MISCELLANEOUS FIRE
DOOR ACCESSORY